

Gas & Electric STOVES





A warm welcome

Nothing creates an inviting atmosphere quite like a Gazco stove. The centrepiece of any home, a Gazco stove adds warmth and character to a room or living space – even if you don't have a chimney!

Whether you want to achieve a minimalist, contemporary look, or have your heart set on a more traditional stove, this brochure will help you make the perfect choice, whatever your style or budget. From the highly efficient contemporary Gas Riva Vision range with all its style and elegance, to the stunning cast iron detail on a more traditional Huntingdon stove, these innovative designs will provide warmth and character to any modern or traditional home.

There is also a new range of highly realistic, electric log-effect stoves featuring new VeriFlame[™] technology. These electric stoves open up new possibilities such as conservatories, kitchens, dining rooms and bedrooms for you to have the warmth and character of a Gazco stove in your home.



Contents

Relax – it's a Gazco stove	4
Flue and Fuel Types	6 - 7
Traditional Styles	
Gas and Electric Marlborough	8 - 11
Gas and Electric Stockton	12 - 17
Gas and Electric Huntingdon 30	18 - 21
Gas and Electric Clarendon	22 - 25
Gas and Electric Ashdon	26 - 31

Contemporary Styles

Gas Ceramica Manhattan	32 - 33
Gas and Electric Steel Manhattan	34 - 37
Gas Riva Vision Small & Midi	38 - 39
Gas Riva Vision Large	40 - 41
Electric Riva Vision Small & Midi	42 - 43
Gas F67 Riva	44 - 45
Gas F67 Riva Bench & Pedestal	46 - 47
Gas F40 Avanti	48 - 49
Gas Riva Nemos	50 - 51
Additional Information	52 - 53
Stove Selector	54 - 57
Technical information	58 - 65











Relax – it's a Gazco stove

When you choose Gazco, quality and innovative technology are assured. From traditional models to contemporary designs, Gazco is committed to creating the ultimate flame-effect gas and electric stoves.

Our research and development laboratories are amongst the most advanced in the world, ensuring that the very latest innovations are incorporated into our appliances.

Gazco is an ISO9001 accredited company. Our rigorous quality control system ensures that all our appliances comply with British safety standards as well as stringent European regulations. All fires in this brochure are CE marked. This means they have been independently tested to exacting European standards for safety as well as both heating efficiency and emissions.

Warranty

Your Gazco Expert Retailer will provide you with a Five Year Extended Warranty for your new gas stove and Two Year Extended Warranty for your new electric stove. Please note, these warranties exclude certain consumable parts. Stoves purchased outside of Gazco's Expert Retailer Network will carry a standard 1 Year Warranty. Full warranty terms & conditions are available to view at **www.gazco.com**



Selecting Your Stove

Before you choose your new stove you will need to know what type of chimney (if you have one) or flue you have. Please turn to pages 6 - 7 to identify your chimney or flue type.

Expert Retailer Network

We take great care to ensure that our fires are designed, tested and manufactured to the highest possible quality and safety standards. We are just as concerned to make certain that they are sold and installed correctly so that you enjoy years of pleasure from your purchase.

Accordingly, you will find our products are only available from experienced, independent retailers who will enable you to see a selection of models locally in their showrooms, often fully operational: discuss your individual requirements both technical (such as sizing the heat output to your room and advising on your flue type) and design; and ensure that you select the most appropriate product for your home. These retailers will also be able to advise on, or assist with, the installation process as well as providing any after-sales support and servicing your appliance may require in the future.

Whilst we encourage our retailers to promote fireplace products and their outlets via the internet, we do not believe suitable levels of customer care and satisfaction can be obtained from purchasing online and we would strongly recommend that you consider this when undertaking your research and making a purchasing decision. Furthermore, please be aware that we do not offer technical support (beyond our statutory responsibilities) to products bought via nationwide online sales, where this support would normally be offered by one of our qualified, independent retailers.

Furthermore, Gazco fires and stoves purchased from within our Expert Retailer Network will have the additional benefit of a greatly extended warranty period, subject to terms and conditions. Full details can be found at www.gazco.com



What's your type?

Before you select your stove, your local Gazco retailer will need to make sure it's suitable for your home. Firstly, you need to know what fuel you will be running. Secondly, you will need to be aware of what type of chimney or flue you have. If you do not have a chimney then don't worry, Gazco have models developed to suit your home too! To assist you in selecting the right stove for your home, a general guide to which models can be installed with the various flue types is given on each page.

Fuel - Gas or Electric?

The majority of our stoves are available in either gas or electric versions. All the electric models run on a standard 13amp plug and have no need for a chimney.

Which Gas type....

All Gazco gas stoves in this brochure can be specified for use with either Natural Gas or LPG. Natural Gas is provided though mains pipelines, whilst LPG is usually supplied to homes in rural areas from a tank in the garden or gas bottles.

Your Home...

The type of chimney or flue you have usually dictates your choice of stove. To help you understand which stoves are suitable for your home, please use the information and pictures shown opposite to identify your chimney. Don't worry, if you don't have a chimney though, you can still find the perfect stove for your home. Once you have identified your chimney (or confirmed you do not have one), take note of the symbol that represents this, as this has been used throughout the brochure to represent the stoves that are suitable for installation in your home.

Conventional Flue

Conventional flue systems are easily recognisable as either a conventional brick or stone chimney, pre-fabricated or pre-cast chimney system. Should your home have none of these at present, it is usually possible to have a pre-fabricated system installed in your home if required.





The chimney stack rises well above the roofline and is topped by a traditional chimney pot or gas terminal. This type of chimney relies on the natural circulation of heated air to expel the products of combustion up your chimney.



Pre-Fabricated Flues (Class 1 & 2) (2)

You will see a metal flue cowl on your roof. Some are all metal whilst others may terminate through a short rectangular pot (but without a chimney stack). These flues create the same circulation of heated air as a brick or stone chimney.





Many modern homes have been built with such flues. You can readily identify them by either a metal flue cowl or a raised ridge terminal on your roof. Again, the natural circulation of heated air expels the products of combustion. This option is only available on the small stoves.

Balanced Flue

Balanced flues work in conjunction with Gazco's Glass Fronted gas stoves. The appliance is completely sealed from the room into which it is installed (so there are no draughts and heating efficiency is increased) and a

twin-wall pipe vents directly to an outside wall.



Balanced Flue



(No chimney required)

Air for combustion is drawn in through the outer pipe whilst the inner pipe removes the combustion gases to the exterior of the property. Depending on the stove selected, the twin-walled pipe may exit horizontally through an external wall or vertically through the roof. Gazco offers a comprehensive range of balanced flue system components. Please refer to our dedicated Concentric Flue System brochure which can be requested from your retailer or viewed online at www.gazco.com.



Powered Flue (No chimney required)

A powered flue uses an extractor unit mounted to vent the combustion gases directly outside. This means that your stove does not have to be installed against an external wall, so it can be located in more rooms around your home. A mains electricity supply is needed to operate this system.



Electric Stoves (No chimney required)

Gazco produce an excellent selection of electric Marlborough, Stockton, Huntingdon 30, Clarendon, Ashdon, Steel Manhattan and Riva Vision stoves which do not, of course, require a chimney or flue of any kind.

No Air Vent required (UK) 🖾

All stoves shown with this symbol, boast the advantage of not normally requiring an air vent* where the air permeability is greater than 5.0m3/hr/m2. Please discuss this in full with your local Gazco retailer. *Requirements in the Republic Of Ireland are different.

This above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download full installation instructions from the Gazco website at www.gazco.com







Country or city, traditional or contemporary, the innovative Gas Marlborough has the flexibility to suit your lifestyle and your décor. It is available in three sizes and each has an extensive window area to allow you to enjoy the dancing flames and warm ambience of the coal or log-effect fires to the full.

Operation is simplicity itself too. There's Piezo ignition and a manual control to adjust the flame height and heat output. Choose Gazco's Command upgradable remote control and you can adjust the flames and heat from your armchair. Alternatively, opt for the deluxe Programmable upgradable remote control to set the stove to switch itself on and off and heat the room to the temperature you select.

Colour Choice

Matt Black

Heat Output

S: 1.95 - 3.60kW ⊠ M: 2.50 - 5.28kW ⊠ L: 3.10 - 7.25kW

Efficiency

Conventional flue 78% Balanced flue 82%

Fuel Bed Coals Logs

Command Controls

Manual Standard upgradable Programmable upgradable

Chimney Types 1 2 3 BF PF (please see pages 6-7)

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 58

Electric Marlborough



Featuring the same distinctive styling as the Gas Marlborough, the two electric versions offer you an amazingly realistic log-effect fire at the touch of a button. At its heart is Gazco's unique VeriFlame[™] technology which allows you to choose from two heat settings that can both be thermostatically controlled; three flame brightness levels, plus the additional option for a blue flame effect on the high setting so you can match your mood exactly. Furthermore, you can select fire effect only; fire effect + 1kw heat; and fire effect + 2kw heat according to your heating needs with full control* from the remote for complete convenience.

The Electric Marlborough simply plugs into a 13amp socket, so is particularly suited for conservatories, bedrooms or home study in fact any room without a chimney.

* The thermostat is controlled manually from the stove.

Colour Choice Matt Black

Heat Output S: 1.00 - 2.00kW ⊗ M: 1.00 - 2.00kW ⊗

Efficiency

Fuel Bed Logs

Command Controls Remote as standard

Chimney Types No chimney required

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 52-53, 57 and 58







Gas Stockton



Using cast iron for the door and heavy gauge steel for the body, Gas Stockton stoves combine simple, understated lines with Gazco's latest living flame technology.

This means you can enjoy an unrivalled coal or log-effect fire together with a heating performance that will keep your room really cosy on those cold winter evenings. In fact, you won't even have to move from your chair if you opt for one of our remote controls!

Colour Choice Matt Black

hatt Diack

Heat Output S: 1.95 - 3.60kW 🔘 M: 2.50 - 5.28kW 阕

Efficiency

Conventional flue 78% Balanced flue 82%

Fuel Bed Coals Logs

Command Controls

Manual Standard upgradable Programmable upgradable



Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 58.



Gas Stockton 5



With authentic multi-fuel stove styling, right down to the hinged door with handle, the Gas Stockton 5 is conveniently sized between the small and medium models featured on the previous page. So you have even more opportunity to suit your needs – and to enjoy all the enchantment of a real coal or log-effect fire.

Choose from manual or remote controls.

Colour Choice Matt Black

Fuel Bed

Logs Coals **Heat Output** 1.95 - 3.40kW 🕲

Efficiency Conventional flue 73% Balanced flue 80%

Command Controls

Manual Standard upgradable Programmable upgradable

Chimney Types **1 2 BF** (please see pages 6-7)

*Please note this is a viable installation in stone, but not suitable for combustible materials. Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 58

Electric Stockton



Using the same cast iron door and heavy gauge steel body as the Gas Stocktons, the electric version combines the classic looks of a woodburning stove with the ease of Gazco's unique VeriFlame™ technology. This means you can enjoy two heat settings that can both be thermostatically controlled; three flame intensity levels, plus the additional option for a blue flame effect on the high setting to create a remarkably authentic log-effect fire - a superb focal point for any room. The fan heater is discreetly hidden beneath the stove with full control* of both heat output and flame effect by remote control.

Choose from the Stockton Small, Stockton 5 or the Stockton Medium.

* The thermostat is controlled manually from the stove.

Colour Choice Matt Black

Heat Output S: 1.00 - 2.00kW (2) 5: 1.00 - 2.00kW (2) M: 1.00 - 2.00kW (2)

Efficiency

Fuel Bed Logs

Command Controls Remote as standard

Chimney Types

No chimney required

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 52-53, 57 and 58







Gas Huntingdon 30



A popular model in the Gazco range, the Gas Huntingdon 30 successfully combines refined styling with efficient heating technology. The Gas Huntingdon 30 is available in a choice of three high quality enamel colours as well as Matt Black and Matt Ivory. This authentic stove also features beautiful tracery windows, that frame the flame picture perfectly, giving great warmth and style to any interior.

Choose from either realistic coal or log fuel effects, the latter sporting a new glowing ember bed feature for the ultimate real fire ambiance. Both fuel effects are available in conventional flue versions, whilst the log effect is also available in a balanced flue model.

The Gas Huntingdon comes with manual control or, for total ease and convenience, upgrade to one of Gazco's command remote controls.

Also see images on page 67 and front cover.

Colour Choice

Matt Black Matt Ivory Laurel Green Midnight Blue Ivory

Heat Output 1.90 - 3.50kW 🛞

Efficiency

Conventional flue 75% Balanced flue 81%

Fuel Bed Logs Coals

Command Controls

Manual Standard upgradable Programmable upgradable

Chimney Types (1 2 BF (please see pages 6-7)

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 59.

Electric Huntingdon 30





The electric version of the ever popular Huntingdon 30. The fine castings and beautiful tracery door of the stove are brought alive with Gazco's VeriFlame[™] technology which provides you with two heat settings that can both be thermostatically controlled; three flame brightness levels, plus the additional option for a blue flame effect on the high setting. Your choice of fire is then set against the highly realistic fuel bed and individually hand painted 'logs', perfectly mirroring the look and atmosphere of a real woodburning stove.

Operation is simple too as the remote control* not only allows selection of the flame and glow but also fire/heat combinations. These can be fire effect only; fire effect + 1 kw heat; and fire effect + 2 kw heat according to the amount of warmth required.

* The thermostat is controlled manually from the stove.

Colour Choice

Matt Black Matt Ivory Laurel Green Midnight Blue Ivory Heat Output 1.00 - 2.00kW

Efficiency 99.8%

Fuel Bed Logs **Command Controls** Remote as standard

Chimney Types No chimney required



For complete model choices, specifications and additional information please see pages 52-53, 57 and 59.





Gas Clarendon





enamel with clear glass and log-effect fire

Superb heating efficiency, finely detailed castings, a real fire effect and choice of three sizes make the Gas Clarendon perfect for a wide variety of homes. Further, whilst the tracery of the standard window provides minimal obscuring of the flames, there are also 'clear glass' versions to attain the fullest possible view of the fire. The small and medium clear glass models are also available in two enamelled colours; Laurel Green and Midnight Blue, additionally the small model is also available in a Matt Ivory paint finish.

According to size of model, the fires may be coal or log-effect. All feature a fully adjustable flame and heat setting whether you opt for manual controls, the Standard remote control or the Programmable remote control. Select the Programmable remote control and you can even set the stove to switch itself on and off twice a day and thermostatically maintain the temperature in your room.

Colour Choice Matt Black Matt Ivory (S) Laurel Green (S & M) Midnight Blue (S & M)

Heat Output S: 1.95 - 3.60kW M: 2.50 - 5.28kW L: 3.10 - 7.25kW **Sizes Available** Small Medium Large

Command Controls Manual Standard upgradable Programmable upgradable Efficiency Conventional flue 78% Balanced flue 82%

Fuel Bed Coals Logs



Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 52-56 and 60.



Electric Clarendon



Authentic styling and elegant castings give the small and medium Clarendon all the character of a real stove but with the convenience of electricity. Simply plug in and switch on for Gazco's highly realistic log-effect fire, complete with your choice of three different brightness levels, including the additional option for a blue flame effect on the high setting, and two heat settings that can both be thermostatically controlled. Soothing comfort and instant controllable warmth.

The heater is discreetly located under the stove but, as heat outputs and VeriFlame™ effects can be controlled from the remote control*, unnecessary crouching or stooping is avoided. Simply sit back and relax in your favourite chair!

* The thermostat is controlled manually from the stove.

Colour Choice

Matt Black Matt Ivory (S) Laurel Green Midnight Blue

Fuel Bed Logs **Sizes Available** Small Medium

Heat Output 1.00 - 2.00kW 🔘

Efficiency 99.8% **Command Controls** Remote as standard

Chimney Types D No chimney required

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 52-53, 57 and 60.





Gas Ashdon



Refinement and performance are very much the hallmarks of the Gas Ashdon. Its graceful lines and fine Gothic tracery window combined with the latest gas fire technology provide a superb focal point for your home.

There is a choice of traditional Matt Black, Matt Ivory, lustrous Midnight Blue, Laurel Green or Ivory enamel finishes; coal or log fuel beds; Standard upgradable and Programmable upgradable remote controls.

Colour Choice Matt Black Matt Ivory Laurel Green Midnight Blue Ivory

Heat Output 2.50 - 5.28k₩ 🛞 **Efficiency** Conventional flue 78%

Balanced flue 82%

Fuel Bed

Logs Coals **Command Controls** Manual

Standard upgradable Programmable upgradable

Chimney Types **1 2 BF PF** (please see pages 6-7)

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 61.



Gas Ashdon - Clear Door



For those who admire the fine lines and heating capacity of the Gas Ashdon, there is the choice of a clear door version. Identical in performance, size and finish options to the Gas Ashdon, the clear door version is for those who crave the fullest possible flame picture without compromise.

Colour Choice

Matt Black Matt Ivory Laurel Green Midnight Blue Ivory

Heat Output 2.50 - 5.28kW 🗵

Efficiency

Conventional flue 78% Balanced flue 82%

Fuel Bed

Logs Coals

Command Controls

Manual Standard upgradable Programmable upgradable



Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 61.

Electric Ashdon



Gazco's popular electric stove features our unique VeriFlame™ technology. It offers a superbly realistic log-effect fire with three different brightness intensities, the additional option for a blue flame effect on the high setting plus two heat settings that can both be thermostatically controlled. Quite simply, it means that you can enjoy all the ambience of a genuine cast iron wood burner with the convenience of a remote control*.

From the hand painted fuel bed and logs to the lustrous enamel and painted finishes, this stove exudes the style and quality to make an impressive focal point in any home.

* The thermostat is controlled manually from the stove.

Also see image on page 57.

Colour Choice

Matt Black Matt Ivory Laurel Green Midnight Blue Ivory



99.8%

Fuel Bed Logs **Command Controls** Remote as standard

Chimney Types No chimney required

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 52-53, 57 and 61.











With its superb contemporary styling and sturdy ceramic panelling, the Manhattan brings a colourful new dimension to home heating. At its centre is a finely detailed, cast iron frame surrounding a panoramic window that allows you to enjoy to the full a realistic picture of dancing flames and glowing coals or logs. To complete the look, a cast iron top grille permits warm, convected air to flow gently into the room.

Choose from manual or remote controls.

Colour Choice Matt Beige

Fuel Bed Coals Logs Heat Output 2.50 - 5.28kW 🕲

Efficiency Conventional flue 78% Balanced flue 82%

Command Controls

Manual Standard upgradable Programmable upgradable

Chimney Types **1 2 BF PF** (please see pages 6-7)

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information including glazing details please see pages 52-56 and 62



Gas Steel Manhattan



With similar styling to the Ceramica Manhattan, the steel versions offer you even more opportunities to co-ordinate with today's contemporary décors, room sizes and furnishings, especially as there are two sizes and each is available in a choice of two finishes.

Whichever way you look at the Steel Manhattan, as a piece of furniture or as a heating appliance, this precision-engineered gas stove provides an outstanding focal point for any room.

Finish Choice Anthracite Brushed Stainless Steel

Fuel Bed Coals Logs Heat Output S:1.76 - 2.85kW 🔕 M: 2.50 - 5.28kW 🔕

Efficiency Conventional flue 78% Balanced flue 82%

Command Controls

Manual Standard upgradable Programmable upgradable

Chimney Types **1 2 BF PF** (please see pages 6-7)

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 62

Electric Steel Manhattan



Contemporary, convenient and comforting, the small and medium Electric Steel Manhattan stoves provide clean lines and contemporary styling with a highly realistic log-effect fire and up to 2kW of heat at the press of a button on the remote control*.

Both versions incorporate Gazco's VeriFlame[™] technology which offers you three different glow intensities with the additional option of a blue flame option on the high setting. For the ultimate in cozy warmth, there are two heat settings that can both be thermostatically controlled from the heater that is discreetly concealed beneath the stove. There is also a choice of modern finishes to blend with a wide range of interiors.

* The thermostat is controlled manually from the stove.

Colour Choice Anthracite Brushed Stainless Steel

Heat Output S: 1.00 - 2.00kW (20) M: 1.00 - 2.00kW (20) **Efficiency** 99.8%

Fuel Bed

Logs

Command Controls Remote as standard

Chimney Types No chimney required

Efficiency figures given are based upon the maximum heat output achieved for these models.

For complete model choices, specifications and additional information please see pages 52-53, 57 and 62.







Gas Riva Vision Small and Midi



Sporting an eye-catching glass-fronted door and integral glass plinth, and boasting three sizes, Small, Midi and Large which is shown overleaf, the high quality Gas Riva Vision is a sparkling new addition to the Gazco stoves range. The Small and Midi models feature our latest highly-realistic log effect fire and a choice of remote controls which can allow complete operation from ignition to extinguish, all from the comfort of your sofa.

To further increase your interior design possibilities, why not also opt for a contemporary stove bench or black gloss flue pipe* - the perfect complement to these stylish contemporary stoves.

Finish Choice Black Glass

Fuel Bed Logs Heat Output S: 2.40 - 2.56kW 🖄 M: 3.26 - 3.44kW 🖄

Efficiency Conventional flue 75% Balanced flue 80% **Command Controls** Standard Remote Thermostatic Remote

Chimney Types (please see pages 6-7)

*Conventional flue only

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 64 For Riva Bench options please see page 65

Gas Riva Vision Large



The Gas Riva Vision large offers a greater heat output than its Small and Midi equivalents, providing a comforting warmth for larger rooms. There is a choice of either a realistic log or contemporary white stone fuel effect, with the option to customise your white stone fire with a choice of three glass bead sets. The log-effect models can be styled even further with a choice of either the timeless black reeded or the lighter vermiculite linings. Whichever you choose, these high-efficiency, stunning flame effects are displayed to their full potential in this wide screen format, complemented by the sleek glass styling and ease of use from the Thermostatic remote control.

For conventional flue versions you can also opt for gloss black flue pipe to continue its reflective qualities and really create that designer look. Consider including a stove bench to further accentuate the contemporary styling (see page 65 for more details).

Finish Choice Black Glass

Heat Output 4.85 - 5.20kW 🔘

Efficiency

Conventional flue 70% Balanced flue 81%

Chimney Types **1 2 B5** (please see pages 6-7)

Linings

Vermiculite (Log Effect) Black Reeded (Log Effect) Black Enamel (White Stone or Glass Beads)

Fuel Beds (see right) White Stones Logs Red, Clear or Black Glass Beads[†]

Command Controls Thermostatic Remote



10000	
11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
	Same and
Sand and	
100 C	10 State

Clear Glass

Reads



Red Glass Beads Black Glass Beads

†Glass Beads are available as an upgrade to White Stone models. Please note that Red Glass beads will darken when burning and then return to their original colour when cool.

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 64.







Electric Riva Vision Small and Midi



The Riva Vision is a contemporary, electric stove that comes in two sizes: Small and Midi; each sporting a highly reflective black glass door, integral glass plinth, black glass top plate and stainless steel detailing for a clean stylish look.

Incorporating an eye-catching flame effect created using Gazco's unique VeriFlame™ technology, the Riva Vision's alluring visuals glow over a realistic hand painted log-effect fuel bed to give all the ambiance and depth of a real log fire.

The three brightness levels can be easily altered with just the touch of a button on the remote control* to create a look to suit your mood. Furthermore, each level is available with or without the 1-2kW of heat output, so you can enjoy the atmostphere created by your electric stove whatever the season!

To increase your interior design possibilities, you can enhance your Riva Vision by choosing from one of ten stylish Riva Stove Benches as shown on page 65.

*The thermostat is controlled manually from the stove.



Finish Choice Black Glass

Fuel Bed Logs

Heat Output S: 1.00 - 2.00kW M: 1.00 - 2.00kW Efficiency 99.8%

Command Controls Remote as standard

Chimney Types (please see pages 6-7)

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-53, 57 and 64 For Riva Bench options please see page 65

Gas F67 Riva



If you need a high level of heating performance and efficiency but are seeking a look that is, perhaps, a little closer to a contemporary fire than a stove, then the F67 Riva offers an exceptionally stylish solution.

At the heart of the F67 Riva is a highly efficient gas log fire. This not only provides a 'real fire' atmosphere, complete with comforting glow and flickering flames, but also up to 4.9kW of effective heating at the turn of a switch. Alternatively, opt for one of our Command remote controls and operation is easier still!

Finish Choice

Black, with polished stainless steel inserts

Efficiency

Conventional flue 72% Balanced flue 75%

Heat Output 2.34 - 4.90kW 🛞

Command Controls Manual Standard upgradable Programmable upgradable Fuel Bed Logs



Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 63 For more information on the Riva F67 Bench options please see page 46 and 65.









Gas F67 Riva Bench and Pedestal



As an alternative interior design option, the F67 Riva can also be mounted on a bench or pedestal.

The specially designed stove benches and pedestals provide extra height, so you can make the most of the view of the fire through the generously wide window, whilst the additional width creates a more striking focal point in your home. The pedestal version even has a tapered design to the rear allowing you to install it into the corner of a room.

For total convenience, choose Gazco's Command Programmable remote that, once the pilot is lit, will allow you to enjoy the handy thermostatic and timer programming features, or simply to adjust the flames and temperature from your favourite armchair.

Finish Choice Black, with polished stainless steel inserts

Fuel Bed

Logs

Heat Output 2.34 - 4.90kW 🔘

Efficiency Conventional flue 72% Balanced flue 75% **Command Controls** Manual

Standard upgradable Programmable upgradable



Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56, 63 and 65 For full Riva Bench options please see page 65

Gas F40 Avanti



The Gas F40 Avanti features contemporary styling that provides a splendid focal point to either modern or traditionally styled interiors, the Gas F40 Avanti is available in three distinctive versions – Avanti, Avanti Midi and Avanti Highline – to suit the widest range of requirements. Each features excellent views of Gazco's highly realistic coal or log fire through its large glass window.

The Gas F40 Avanti range is finished in a combination of Gazco's Iridium and Black finishes.

Finish Choice

Iridium/Black

Efficiency Conventional flue 73% Balanced flue 78% **Heat Output** 2.34 - 4.02kW

Command Controls Manual Standard upgradable Programmable upgradable Fuel Bed Coals

Logs

Chimney Types **1 2 BF** (please see pages 6-7)

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 63







Gas Riva Nemos



Combining both pure lines and soft curves, the Riva Nemos has an allure that is immediate. However, its beauty is more than skin deep, because behind the glass window you will find a state-of-the-art gas fire featuring superbly sculpted driftwood logs and an exceptionally realistic flame pattern.

Furthermore, the Riva Nemos has been developed for highly efficient heating. Opt for the Programmable remote control and you can even wake up or come home to that cosy 'real fire' atmosphere and a room temperature to suit your needs.

Finish Choice

Iridium/Black Brushed Stainless/Black

Fuel Bed Driftwood **Heat Output** 2.44 - 5.10kW 🔘

Efficiency 75%

Command Controls Manual

Standard upgradable Programmable upgradable

Chimney Types BF (please see pages 6-7)

Efficiency figures given are based upon the maximum heat output achieved for these models. For complete model choices, specifications and additional information please see pages 52-56 and 62

Additional Information

Impressive features

All Gazco gas stoves have an outstanding list of standard features:

- Ceramic fibre coals, logs or driftwood skillfully sculpted for maximum 'real fire' effect and atmosphere
- **Multi-purpose control knobs** for simple, fingertip control of ignition, pilot light and gas supply
- **Piezo ignition** automatic sparking without batteries or electricity
- Adjustable flame setting infinitely adjustable between high and low
- Convection system for improved heating efficiency and safety
- Flame failure device automatically shuts off the gas supply if the pilot light goes out
- Flue Sure System[®] Gazco's special safety system shuts off the gas supply in the case of accidental flue blockage (conventional flue models only)
- Choice of flue exit top or rear exit options for greater flexibility of installation (except small balanced flue models which are rear exit only)

Command remote controls

Gas Stoves

Gazco was the first UK company to introduce remote controls for gas fires. Today, our Command remote control systems allow most stoves to be upgraded, either at the time of purchase or at a later date, with either:



a) Standard upgradable remote control

Once the pilot light has been ignited manually you can vary the flame height and heat output from the comfort of your armchair.

	ŀ	i		
1	Ŀ		Į	
1			i	
I				
1				

b) Programmable upgradable remote control

This deluxe version has two additional features. The first allows you to thermostatically control the room temperature whilst the second allows you to programme your stove to switch itself on and off twice a day. Use both and you can even come home to a glowing fire that has heated the room to the temperature you select.



c) Standard remote control for Gas Riva Vision Small & Midi

The standard remote control allows you to ignite your stove, choose between four different flame settings, extinguish and leave in standby mode with the pilot lit from almost anywhere in your room.

d) Thermostatic remote control for Gas Riva Vision Small, Midi & Large

This deluxe version is loaded with exciting features that make it possible to program your stove to perfectly complement your lifestyle. Not only can you ignite, extinguish and thermostatically control your stove, this remote control system benefits from advanced technology that gives you the option to create an automatic, intelligent heating program that means your home is comfortable and cosy at any time of the day or night.

Colour/finish choices

According to model, the colour/finishes available are shown below:



Electric Stoves

Our range of Electric Stoves are as easy to install as plugging in and switching on! They are available in a range of designs from traditional to modern, ensuring that there is an electric stove available to suit all pockets and locations. The heater and VeriFlame™ controls for each fire are discreetly located under the stove and can be operated using the supplied remote*.

The VeriFlame™ technology consists of two heat settings that can both be thermostatically controlled, three flame intensities, plus the additional option of a blue flame effect on the high setting - so you can mix and match to create the perfect ambience. Select from fire effect only, fire effect + 1 kW heat and fire effect + 2 kW heat. Every VeriFlame™ setting beautifully highlights the highly realistic hand painted log-effect glass fibre fuel bed.

*The thermostat is controlled manually from the stove.

The Gazco VeriFlame™ Difference



Unique on the market, Gazco's VeriFlame™ technology produces the ultimate in realistic fire effects. The complementary remote control allows you to independently adjust the brightness and colour of the flames and fuel bed so you can produce the exact ambience you require. Complete flexibility at the touch of a button. There are also discreetly concealed manual controls should the batteries in the remote control run out of power.

Technical Specifications

All specifications given in the main part of this brochure are approximate. Actual specifications for each individual product will vary according to the exact model and are given on pages 58-65. Your Gazco retailer will be pleased to help explain specific model specifications and provide any further information you may require, or you can view/ download specification sheets from **www.gazco.com**.

Installation and Safety

Gazco gas stoves must be fitted by a qualified gas installer (GasSafe registered in the United Kingdom or Bord Gais registered in the Republic of Ireland) who should also verify the proposed site conditions are fully suitable for the product selected. Complete installation instructions for many models can be obtained prior to purchase by downloading them from **www.gazco.com**.

Please note that all parts of these stoves become extremely hot during operation and can result in serious injury and burns if touched. It is therefore recommended that a fireguard complying with BS 8423:2002 is used in the presence of young children, the elderly or infirm.

Colours

Owing to variations in studio lighting and printing inks, the colours of stoves illustrated in this brochure may differ slightly from actual models.

In addition, the glaze used on the Ceramica Manhattan is fired on to the ceramic shell castings at very high temperatures. These castings sometimes have shading variations in the glaze finish and this does not constitute a fault, indeed, they add to the charm and individuality of every piece.

Product improvement

Gazco pursue a policy of continuous product improvement, therefore, whilst our products are correct at the time of the photography, we reserve the right to make alterations and amendments. Exact product details should be discussed with your retailer at the time of purchase.

All fire and flame photography has been taken from genuine products; however, the exact appearance of the flame picture for any appliance will vary depending on the nature of the flue type, installation surroundings, local geographical features and the way in which the appliance is operated.

Please note: The operation and appearance of gas appliances depends on variable factors such as the gas pressure supplied.

Warranty information

Your Gazco Expert Retailer will provide you with a Five Year Extended Warranty for your new gas stove and Two Year Extended Warranty for your new electric stove. Please note, these warranties exclude certain consumable parts. Full warranty terms & conditions are available to view at **www.gazco.com**









GAS STOVES - dimensions and options

Model	Model Overall		s (mm)	Approx weight (kg)	
	w	w н			Conventional or Pre-fabricated flue
Gas Marlborough - Matt Black only					
Small	410	533	360	35	1
Medium	590	583	410	48	1
Large	730	628	420	56	1
Gas Stockton - Matt Black only					
Small	422	525	340	57	1
Stockton 5	481	544	337	55	✓
Medium	579	618	411	77	✓
Gas Huntingdon 30 - Matt Black, La	urel Green, Midnight B	lue, Ivory and M	latt Ivory		
	560	592	351	72	✓
Gas Clarendon - Matt Black but also I	Laurel Green and Midn	ight Blue on S &	& M Clear Glas	s models and Matt Ivory or	n Small models
Small	431	589	342	56	1
Medium	654	652	427	86	1
Large	779	710	468	102	1
Small - clear glass	431	589	342	54	1
Medium - clear glass	654	652	427	84	1
Large - clear glass	779	710	468	99	1
Gas Ashdon - Matt Black, Laurel Gree	n, Midnight Blue, Ivory	and Matt Ivory			
Medium	654	652	515	88	1
Medium - clear glass	654	652	515	86	1
Gas Ceramica Manhattan - Matt Bei	ge only				I
	711	720	427	110	1
Gas Steel Manhattan - Anthracite an	d Brushed Stainless St	eel			I
Small	540	635	360	64	-
Medium	711	700	427	80	✓
Gas Riva Nemos - Iridium/Black Brush	ned Stainless Steel/Bla	.ck			I
	694	1148	424	122	-
Gas Riva Vision - Black Glass				1	
Small - Conventional Flue	370	529	289	33	-
Small - Balanced Flue	370	529	289	35	-
Midi - Conventional Flue	415	605	311	39	-
Midi - Balanced Flue	415	605	311	41	-
Large - Conventional Flue	876	631	390	74.5	-
Large - Balanced Flue	876	656	375	78.5	-
Gas F40 Avanti - Iridium/Black only					
Avanti	462	644	331	45	1
Midi	462	824	331	55	<i>✓</i>
Highline	462	999	331	65	<i>✓</i>
Gas Riva F67 - Black, with polished s				1	
Riva F67	880	592	420	58	-
Riva F67 Bench	1200	942	420	102	_
Riva F67 Pedestal	880	843	420	98	_
	000	015		50	

Important Notes:

Conventional Flue Pipe and options: for flue pipe codes and options such as flue collars, closure plates and spigot extensions, please see price list.

2. Balanced Flue:

in addition, please order appropriate flue kit and optional flue collar. Please see price list for details.

3. Powered Flue:

please order powered flue kit and, if terminal is to be less than 2m above ground level, a terminal guard is also required. **4.** *: indicates product is available with rear flue exit only. **†:** indicates product is available with top flue exit only.

5. All other products are top or rear.

Coal fire		Log	fire	White Stones			
Pre-cast flue	Powered flue	Conventional or Pre-fabricated	Balanced flue	Conventional or Pre-fabricated	Balanced flue		
				1			
<i>✓</i>	1	-	✓*	-	-		
-	1	1	✓	-	-		
-	1	-	-	-			
 Image: A second s	1	_	✓*	_	_		
-		_	 ✓	_			
_			 ✓				
	v	V	•	_			
-	_	 ✓ 	✓	-	_		
				1			
1	1	-	✓*	-	-		
-	1	✓ ✓	✓	-	-		
-	1	-	-	-	-		
1	1	-	✓*	-	-		
-	1	1	✓	-	-		
-	1	-	-	-	-		
-	1	<i>✓</i>	✓	-	-		
-	1	✓ ✓	\checkmark	-	-		
-	1		✓	-	-		
-	-	-	✓*	-	-		
-	1	✓ ✓	1	-	-		
			4 1				
-	-	-	√ †	-	-		
		✓	-	-			
-	-			-	-		
-		✓ ✓	-	-			
-	_	-	✓	-	_		
-	_	†	-	↓	_		
-	_	-	✓†	-	✓†		
		1		I			
-	-	-	1	-	-		
-	-	-	1	-	-		
-	-	-	1	-	-		
-	_	✓ [†]	\checkmark^{\dagger}	-	_		
-	-	✓†	\checkmark^{\dagger}	-	-		
-	-		✓†	-	-		

GAS FLUE SYSTEMS

1. Closure Plate and Spigot Extension^Δ

This is a flue system suitable for homes with existing conventional chimneys in which an airtight, steel closure plate is fitted over a fireplace opening or Class 2 pre-cast starter block and a short piece of flue extends from the back of the stove, through the plate, into the chimney. The products of combustion are carried up the chimney by natural convection.

Models which can be fitted with a closure plate and spigot extension are:

Small Gas Marlborough, Small Gas Stockton, Small Gas Clarendon, Medium Gas Marlborough and Medium Gas Stockton.

Models which can be fitted to a pre-cast chimney with a closure plate are:

Small Gas Marlborough, Small Gas Stockton and Small Gas Clarendon.

2. Rigid or Flexible Metal Flue^A

With this flue system rigid metal tubes, or a combination of rigid and flexible metal tubes, extend vertically directly from the stove to the outside of the property. This may be either straight through the ceiling or roof with the flue pipe exposed, or by using the channel of a chimney or a studwork enclosure. The products of combustion are carried up the flue by natural convection.

Models which can use this system are:

Small, Medium and Large Gas Marlborough, Small and Medium Gas Stockton, Gas Stockton 5, Huntingdon 30, Small, Medium and Large Gas Clarendon and clear glass, Gas Ashdon and clear glass, Ceramica Manhattan, Small and Medium Steel Manhattan, Gas F40 Avanti, Midi and Highline, Gas F67 Riva, Gas F67 Riva Bench, Gas F67 Riva Pedestal and Gas Riva Vision Small, Midi & Large[†]. ([†] Top outlet only)

3. Balanced Flue

Where a room has no chimney, then a Balanced Flue version of a Gazco stove is a practical option. The flue consists of one tube inside another. The outer tube brings air into the stove for combustion whilst the inner one emits the products of combustion.

Options: A - Rear outlet (max 600mm wall thickness).

B - Top outlet/up and out (min rise 500mm, max 3m), horizontal (min 250mm, max 5m). An additional bend can be incorporated in to the horizontal section of the 'up and out', dependent upon a 1m min vertical rise.

- C Top outlet/vertical (min 3m, max 10m).
- D Top outlet/vertical with offset (min to first bend 500mm, max flue length 10m).

Ask your retailer for full technical details or see our Concentric Flue System brochure at www.gazco.com.

Models which can use this system are:

Small* and Medium Gas Marlborough, Small* and Medium Gas Stockton, Gas Stockton 5, Gas Huntingdon 30, Gas F40 Avanti, Midi and Highline, Gas F67 Riva[†], Gas F67 Riva Bench[†], Gas F67 Riva Pedestal[†], Small* and Medium Gas Clarendon and Clear Glass, Gas Ashdon and clear glass, Ceramica Manhattan, Small* and Medium Steel Manhattan and Gas Riva Nemos[†] and Gas Riva Vision Small, Midi & Large[†]. (*Rear outlet only [†] Top outlet only). All Balanced Flue models are log effect only.

4. Powered Flue


Where a room has no chimney then a Powered Flue is the answer. It is a special extractor unit which attaches to an outside wall and removes the products of combustion, along a rigid metal pipe by fan action. Generally the flue pipe can be of longer lengths than with a Balanced Flue and can also include a number of 90° bends.

Models which can use this system are:


Small, Medium and Large Gas Marlborough, Small and Medium Gas Stockton, Small, Medium and Large Gas Clarendon and clear glass, Gas Ashdon and clear glass, Ceramica Manhattan and Medium Steel Manhattan.


Use Powered Flue with coal effect only.

 Δ Due to the high efficiency and the limited flue flow of the closed convector stoves, a 5" (125mm) flexible flue liner is required when installing the stoves into a brick chimney or a larger than 5" (125mm) diameter lined flue. The only exception to this is stoves that are listed as suitable for installation with a Gazco closure plate and spigot over a standard 22" x16" fire opening.









ELECTRIC STOVES - dimensions and options

Model	Overall	dimensio	ns (mm)	Approx weight (kg)	Log Fire
	w	н	D		Electric No flue req.
Electric Marlborough - Matt Blac	ck only				
Small	410	559	360	35	✓
Medium	590	583	410	48	1
Electric Stockton - Matt Black on	ly				
Small	422	525	340	57	1
Stockton 5	481	544	337	55	✓
Medium	579	618	411	82	1
Electric Huntingdon 30 - Matt E	Black, Laurel Green, Midr	night Blue, Iv	vory and Ma	att Ivory	
	560	592	351	71.5	1
Electric Clarendon - Matt Black, I	Laurel Green, Midnight E	Blue and Ma	tt Ivory (Sn	nall only)	
Small	431	589	342	56	1
Medium	654	652	427	78	1
Electric Ashdon - Matt Black, Lau	rel Green, Midnight Blue	e, Ivory and	Matt Ivory		
	654	652	515	78	1
Electric Steel Manhattan - Anthr	acite and Brushed Stain	less Steel			
Small	540	635	360	33	1
Medium	711	700	427	44	1
Electric Riva Vision - Black Glass	5			· · · · · · · · · · · · · · · · · · ·	
Small	370	555	297	24	1
Midi	415	604	317	28	1




Gas and Electric Marlborough

	Product Code	Model	Colour	Flue Type	Logs/ Coals	Fuel Type	Heat Input	Heat Output	Efficiency
(X)	8560	Small	Matt Black	Conventional	Coals	Nat.Gas	4.55kW	3.55kW	78%
(X)	8536	Small	Matt Black	Balanced	Logs	Nat.Gas	3.65kW	2.85kW	78%
\boxtimes	8564	Medium	Matt Black	Conventional	Coals	Nat.Gas	6.60kW	5.15kW	78%
(X)	8610LUC	Medium	Matt Black	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
(X)	8535LUC	Medium	Matt Black	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
	8568	Large	Matt Black	Conventional	Coals	Nat.Gas	8.90kW	6.95kW	78%
\boxtimes	P8560	Small	Matt Black	Conventional	Coals	LPG	4.60kW	3.60kW	78%
X	P8536	Small	Matt Black	Balanced	Logs	LPG	3.65kW	2.85kW	78%
(X)	P8564	Medium	Matt Black	Conventional	Coals	LPG	6.30kW	4.90kW	78%
(X)	P8610LUC	Medium	Matt Black	Conventional	Logs	LPG	6.40kW	5.25kW	82%
(\mathbf{X})	P8535LUC	Medium	Matt Black	Balanced	Logs	LPG	6.15kW	5.04kW	82%
	P8568	Large	Matt Black	Conventional	Coals	LPG	9.30kW	7.25kW	78%
(X)	E8560	Small	Matt Black	N/A	Logs	Elec	-	2.00kW	99%
(X)	E8610	Medium	Matt Black	N/A	Logs	Elec	-	2.00kW	99%

Marlborough Dimensions (see letters on diagram)

	Α		в		с		D		Е		F	
	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm
Small	161/8	410	21*	533*	14 %	360	11	280	131%	352	438	111
Medium	231⁄4	590	23	583	161%	410	13	330	15¾	401	4	101
Large	28¾	730	24¾	628	16½	420	1338	340	$17\frac{1}{2}$	446	4	101
Large	28¾	730	24¾	628	16½	420	1338	340	17½	446	4	101

* Small Electric Marlborough is 1" (25mm) higher.



[†](Balanced flue version 5¹/₄" 134mm).

 * (Small balanced flue version 14 1 /2" 370mm).

*(Medium balanced flue version 17%" 453mm).

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

The Marlborough has a choice of top or rear flue exit and can be supplied with an optional rear closure plate: Small **(8108)**, Medium **(8109)** and spigot extension **(8111)**. Small balanced flue stoves are rear exit only.

Stove Flue Pipe

Balanced flue versions of the Gas Marlborough must only use the 6" stainless steel flue provided. For additional Matt Black, Midnight Blue, Laurel Green and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version Marlborough stove. The components usually required are:

Description	Product Code
1' Straight pipe	4500
2' Straight pipe	4501
3' Straight pipe	4502
90° long 'elbow' adaptor (9" projection)	4514
Flue collar	8549
Remote Controls for Gas Marlborough	
Description	Product Code

Description	I Toduce coue
Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456


Gas and Electric Stockton

	Product Code	Model	Colour	Flue Type	Logs/ Coals	Fuel Type	Heat Input	Heat Output	Efficiency
\boxtimes	8573	Small	Matt Black	Conventional	Coals	Nat Gas	4.55kW	3.55kW	78%
X	8540	Small	Matt Black	Balanced	Logs	Nat Gas	3.65kW	2.85kW	78%
(X)	8574	Medium	Matt Black	Conventional	Coals	Nat Gas	6.60kW	5.15kW	78%
(X)	8575MCUC	5	Matt Black	Conventional	Coals	Nat Gas	4.60kW	3.36kW	73%
(\boxtimes)	8563LUC	5	Matt Black	Balanced	Logs	Nat Gas	4.25kW	3.40kW	80%
X	8617LUC	Medium	Matt Black	Conventional	Logs	Nat Gas	6.60kW	5.28kW	80%
	8570LUC	Medium	Matt Black	Balanced	Logs	Nat Gas	6.40kW	5.25kW	82%
(X)	P8573	Small	Matt Black	Conventional	Coals	LPG	4.60kW	3.60kW	78%
\boxtimes	P8540	Small	Matt Black	Balanced	Logs	LPG	3.65kW	2.85kW	78%
X	P8574	Medium	Matt Black	Conventional	Coals	LPG	6.30kW	4.90kW	78%
(X)	P8617LUC	Medium	Matt Black	Conventional	Logs	LPG	6.40kW	5.25kW	82%
\boxtimes	P8570LUC	Medium	Matt Black	Balanced	Logs	LPG	6.15kW	5.04kW	82%
(\boxtimes)	P8575MCUC	5	Matt Black	Conventional	Coals	LPG	4.40kW	3.21kW	73%
X	P8563LUC	5	Matt Black	Balanced	Logs	LPG	4.10kW	3.28kW	80%
(X)	E8573	Small	Matt Black	N/A	Logs	Elec	-	2.00kW	99%
(X)	E8575	5	Matt Black	N/A	Logs	Elec	-	2.00kW	99%
	E8617	Medium	Matt Black	N/A	Logs	Elec	-	2.00kW	99%

Stockton Dimensions (see letters on diagram)

		4	E	3	0	2	0	2	I	E	I	F
	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm
Small	16 %	422	20 %	525	11½	290	133/8	346	4 %	110	2	50
Medium	22¾	579	24³ ₁₆	618	13%	345	1634	425	4	102	2%	66
5	19	481	21½	544	10¾	273	15	380	3%	92	21/2	64

The above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions from the Gazco website at **www.gazco.com**



⁺(Balanced flue version 5½" 140mm).

*(Small balanced flue version 14½" 366mm)

*(Medium balanced flue version 19" 482mm)

*(Stockton 5 balanced flue 15¹/₄" 401mm)

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

The Stockton has a choice of top or rear flue exit. Small and medium models can be supplied with an optional rear closure plates: Small **(8042)**, Medium **(8105)** and spigot extension **(8111)**. Small balanced flue stoves are rear exit only.

Stove Flue Pipe

Balanced flue versions of the Gas Stockton must only use the 6" stainless steel flue provided. For additional Matt Black, Midnight Blue, Laurel Green and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version. The components required are:

Description	Product Code
1' Straight pipe	4500
2' Straight pipe	4501
3' Straight pipe	4502
90° Long 'elbow' adaptor (9" projection)	4514
Flue collar	8549
Remote Controls for Gas Stockton	
Description	Product Code
Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456

Gas and Electric Huntingdon 30

	Product Code	Colour	Flue Type	Fuel Effect	Fuel Type	Heat Input	Heat Output	Efficiency
\boxtimes	515-004	Matt Black	Conventional	Logs	Nat Gas	4.55kW	3.40kW	75%
\boxtimes	515-413	Matt Black	Conventional	Logs	LPG	4.55kW	3.40kW	75%
\boxtimes	515-048	Midnight Blue	Conventional	Logs	Nat Gas	4.55kW	3.40kW	75%
\boxtimes	515-460	Midnight Blue	Conventional	Logs	LPG	4.55kW	3.40kW	75%
(\boxtimes)	515-023	Laurel Green	Conventional	Logs	Nat Gas	4.55kW	3.40kW	75%
\boxtimes	515-427	Laurel Green	Conventional	Logs	LPG	4.55kW	3.40kW	75%
\boxtimes	515-154	lvory	Conventional	Logs	Nat Gas	4.55kW	3.40kW	75%
	515-484	lvory	Conventional	Logs	LPG	4.55kW	3.40kW	75%
(\boxtimes)	515-212	Matt Ivory	Conventional	Logs	Nat Gas	4.55kW	3.40kW	75%
\boxtimes	515-536	Matt Ivory	Conventional	Logs	LPG	4.55kW	3.40kW	75%
\boxtimes	8503CFMCUC	Matt Black	Conventional	Coals	Nat Gas	4.60kW	3.50kW	76%
	8503CFMCUCMB	Midnight Blue	Conventional	Coals	Nat Gas	4.60kW	3.50kW	76%
(\boxtimes)	8503CFMCUCLG	Laurel Green	Conventional	Coals	Nat Gas	4.60kW	3.50kW	76%
X	8503CFMCUCIV	lvory	Conventional	Coals	Nat Gas	4.60kW	3.50kW	76%
(\boxtimes)	515-013	Matt Ivory	Conventional	Coals	Nat Gas	4.60kW	3.50kW	76%
	P8503CFMCUC	Matt Black	Conventional	Coals	LPG	4.40kW	3.35kW	76%
(\boxtimes)	P8503CFMCUCMB	Midnight Blue	Conventional	Coals	LPG	4.40kW	3.35kW	76%
\boxtimes	P8503CFMCUCLG	Laurel Green	Conventional	Coals	LPG	4.40kW	3.35kW	76%
\boxtimes	P8503CFMCUCIV	lvory	Conventional	Coals	LPG	4.40kW	3.35kW	76%
	515-494	Matt Ivory	Conventional	Coals	LPG	4.40kW	3.35kW	76%
\boxtimes	515-257	Matt Black	Balanced	Logs	Nat Gas	4.30kW	3.50kW	81%
\boxtimes	515-561	Matt Black	Balanced	Logs	LPG	4.30kW	3.50kW	81%
\boxtimes	515-368	Midnight Blue	Balanced	Logs	Nat Gas	4.30kW	3.50kW	81%
	515-637	Midnight Blue	Balanced	Logs	LPG	4.30kW	3.50kW	81%
	515-319	Laurel Green	Balanced	Logs	Nat Gas	4.30kW	3.50kW	81%
\boxtimes	515-611	Laurel Green	Balanced	Logs	LPG	4.30kW	3.50kW	81%
	515-395	lvory	Balanced	Logs	Nat Gas	4.30kW	3.50kW	81%
\boxtimes	515-664	lvory	Balanced	Logs	LPG	4.30kW	3.50kW	81%
\boxtimes	515-333	Matt Ivory	Balanced	Logs	Nat Gas	4.30kW	3.50kW	81%
	515-712	Matt Ivory	Balanced	Logs	LPG	4.30kW	3.50kW	81%
	E8503	Matt Black	N/A	Logs	Elec	-	2.00kW	99%
\boxtimes	E8503MB	Midnight Blue	N/A	Logs	Elec	-	2.00kW	99%
\boxtimes	E8503LG	Laurel Green	N/A	Logs	Elec	-	2.00kW	99%
\boxtimes	E8503IV	lvory	N/A	Logs	Elec	_	2.00kW	99%
(\boxtimes)	615-567	Matt Ivory	N/A	Logs	Elec	-	2.00kW	99%

[†](Balanced flue version 195mm (7⁴/₅)).

*(Balanced flue version 422mm (16 3 ₅))

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm). The Huntingdon 30 has a choice of top or rear flue exit.


Stove Flue Pipe

Balanced flue versions of the Gas Huntingdon 30 must only use the 6" stainless steel flue provided. For additional Matt Black, Matt Ivory, Midnight Blue, Laurel Green and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version. The components required are:

Description	Product Code
1' Straight pipe, Matt Black	4500
2' Straight pipe, Matt Black	4501
3' Straight pipe, Matt Black	4502
90° long 'elbow' adaptor (9" projection), Matt Black	4514
1' Straight pipe, Midnight Blue	4500MBL
2' Straight pipe, Midnight Blue	4501MBL
3' Straight pipe, Midnight Blue	4502MBL
1' Straight pipe, Laurel Green	4500LG
2' Straight pipe, Laurel Green	4501LG
3' Straight pipe, Laurel Green	4502LG
1' Straight pipe, Ivory	4500IV
2' Straight pipe, Ivory	4501IV
3' Straight pipe, Ivory	4502IV
1' Straight pipe, Matt Ivory	4500PI
2' Straight pipe, Matt Ivory	4501PI
3' Straight pipe, Matt Ivory	4502PI
Flue collar, Matt Black	8549
Flue collar, Midnight Blue	8549MB
Flue collar, Laurel Green	8549LG
Flue collar, Ivory	8549IV
Flue collar, Matt Ivory	999-407

Remote Controls for Gas Huntingdon 30

Description	Product Code
Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456



Huntingdon 30 Dimensions (see letters on diagram)

	1	A	E	3	c	2	0)	I	E	I	F	c	G
	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm
30	22	560	231/4	592	131/8	351	15 ³ /4	403	34/5	96	6 ⁷ /8	174	18%	475

Gas and Electric Clarendon

	Product Code	Model	Colour	Flue Type	Logs/ Coals	Fuel Type	Heat Input	Heat Output	Efficiency
(\boxtimes)	8541	Small	Matt Black	Conventional	Coals	Nat.Gas	4.55kW	3.55kW	78%
(X)	8538	Small	Matt Black	Balanced	Logs	Nat.Gas	3.65kW	2.85kW	78%
\boxtimes	570-154	Small	Matt Ivory	Conventional	Coals	Nat.Gas	4.55kW	3.55kW	78%
\boxtimes	570-199	Small	Matt Ivory	Balanced	Logs	Nat.Gas	3.65kW	2.85kW	78%
(X)	8542	Medium	Matt Black	Conventional	Coals	Nat.Gas	6.60kW	5.12kW	78%
\boxtimes	8611LUC	Medium	Matt Black	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
\boxtimes	8545LUC	Medium	Matt Black	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
	8543	Large	Matt Black	Conventional	Coals	Nat.Gas	8.90kW	6.95kW	78%
\boxtimes	P8541	Small	Matt Black	Conventional	Coals	LPG	4.60kW	3.59kW	78%
\boxtimes	P8538	Small	Matt Black	Balanced	Logs	LPG	3.65kW	2.85kW	78%
\boxtimes	570-514	Small	Matt Ivory	Conventional	Coals	LPG	4.60kW	3.59kW	78%
\boxtimes	570-477	Small	Matt Ivory	Balanced	Logs	LPG	3.65kW	2.85kW	78%
\boxtimes	P8542	Medium	Matt Black	Conventional	Coals	LPG	6.30kW	4.91kW	78%
\boxtimes	P8611LUC	Medium	Matt Black	Conventional	Logs	LPG	6.40kW	5.25kW	82%
\boxtimes	P8545LUC	Medium	Matt Black	Balanced	Logs	LPG	6.15kW	5.04kW	82%
	P8543	Large	Matt Black	Conventional	Coals	LPG	9.30kW	7.25kW	78%

Gas and Electric Clarendon Clear Glass

(X)	8517	Small	Matt Black	Conventional	Coals	Nat Gas	4.55kW	3.55kW	78%
	8517B	Small	Midnight	Conventional	Coals	Nat Gas	4.55kW	3.55kW	78%
(X)	8517G	Small	Laurel	Conventional	Coals	Nat Gas	4.55kW	3.55kW	78%
	570-227	Small	Matt Ivory	Conventional	Coals	Nat Gas	4.55kW	3.55kW	78%
	8562	Small	Matt Black	Balanced	Logs	Nat Gas	3.65kW	2.85kW	78%
	8562B	Small	Midnight	Balanced	Logs	Nat Gas	3.65kW	2.85kW	78%
\boxtimes	8562G	Small	Laurel	Balanced	Logs	Nat Gas	3.65kW	2.85kW	78%
	570-259	Small	Matt Ivory	Balanced	Logs	Nat Gas	3.65kW	2.85kW	78%
(X)	8518	Medium	Matt Black	Conventional	Coals	Nat Gas	6.60kW	5.15kW	78%
	8518B	Medium	Midnight	Conventional	Coals	Nat Gas	6.60kW	5.15kW	78%
\boxtimes	8518G	Medium	Laurel	Conventional	Coals	Nat Gas	6.60kW	5.15kW	78%
	8612LUC	Medium	Matt Black	Conventional	Logs	Nat Gas	6.60kW	5.12kW	80%
(\boxtimes)	8612BLUC	Medium	Midnight	Conventional	Logs	Nat Gas	6.60kW	5.12kW	80%
\boxtimes	8612GLUC	Medium	Laurel	Conventional	Logs	Nat Gas	6.60kW	5.12kW	80%
	8547LUC	Medium	Matt Black	Balanced	Logs	Nat Gas	6.40kW	5.25kW	82%
	8547BLUC	Medium	Midnight	Balanced	Logs	Nat Gas	6.40kW	5.25kW	82%
	8547GLUC	Medium	Laurel	Balanced	Logs	Nat Gas	6.40kW	5.25kW	82%
	8519	Large	Matt Black	Conventional	Coals	Nat Gas	8.90kW	6.95kW	78%
\boxtimes	P8517	Small	Matt Black	Conventional	Coals	LPG	4.60kW	3.59kW	78%
	P8517B	Small	Midnight	Conventional	Coals	LPG	4.60kW	3.59kW	78%
\boxtimes	P8517G	Small	Laurel	Conventional	Coals	LPG	4.60kW	3.59kW	78%
	570-443	Small	Matt Ivory	Conventional	Coals	LPG	4.60kW	3.59kW	78%
	P8562	Small	Matt Black	Balanced	Logs	LPG	3.65kW	2.85kW	78%
\boxtimes	P8562B	Small	Midnight	Balanced	Logs	LPG	3.65kW	2.85kW	78%
\boxtimes	P8562G	Small	Laurel	Balanced	Logs	LPG	3.65kW	2.85kW	78%
	570-413	Small	Matt Ivory	Balanced	Logs	LPG	3.65kW	2.85kW	78%
	P8518	Medium	Matt Black	Conventional	Coals	LPG	6.30kW	4.91kW	78%
\boxtimes	P8518B	Medium	Midnight	Conventional	Coals	LPG	6.30kW	4.91kW	78%
\boxtimes	P8518G	Medium	Laurel	Conventional	Coals	LPG	6.30kW	4.91kW	78%
	P8612LUC	Medium	Matt Black	Conventional	Logs	LPG	6.40kW	5.25kW	82%
	P8612BLUC	Medium	Midnight	Conventional	Logs	LPG	6.40kW	5.25kW	82%
\boxtimes	P8612GLUC	Medium	Laurel	Conventional	Logs	LPG	6.40kW	5.25kW	82%
\boxtimes	P8547LUC	Medium	Matt Black	Balanced	Logs	LPG	6.15kW	5.04kW	82%
	P8547BLUC	Medium	Midnight	Balanced	Logs	LPG	6.15kW	5.04kW	82%
\boxtimes	P8547GLUC	Medium	Laurel	Balanced	Logs	LPG	6.15kW	5.04kW	82%
	P8519	Large	Matt Black	Conventional	Coal	LPG	9.30kW	7.25kW	78%
	E8517	Small	Matt Black	N/A	Logs	Elec	-	2.00kW	99%
	E8517MB	Small	Midnight	N/A	Logs	Elec	-	2.00kW	99%
	E8517LG	Small	Laurel	N/A	Logs	Elec	-	2.00kW	99%
	670-017	Small	Matt Ivory	N/A	Logs	Elec	-	2.00kW	99%
	E8612	Medium	Matt Black	N/A	Logs	Elec	-	2.00kW	99%
X	E8612MB	Medium	Midnight	N/A	Logs	Elec	-	2.00kW	99%
			Laurel	N/A	Logs	Elec		2.00kW	99%


*(Small balanced flue version 17" 430mm).

*(Medium balanced flue version 201/2" 520mm).

⁺(Medium balanced flue version 6¹/₄" 158mm).

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

The Clarendon has a choice of top or rear flue exit and the Small Clarendon can be supplied with an optional rear closure plate **(8104)** and spigot extension **(8111)**. Small balanced flue stoves are rear exit only.

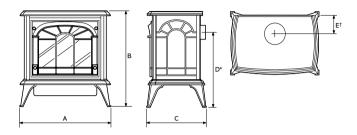

Clarendon Dimensions (see letters on diagram)

	Α		I	в	С [D E		E	
	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm
Small	17	431	2312	589	13½	342	16	404	5	125
Medium	25¾	654	25¾	652	16¾	427	181/4	463	5	126
Large	30%	779	28	710	18½	468	20%	517	6½	166

Stove Flue Pipe

Balanced flue versions of the Gas Marlborough must only use the 6" stainless steel flue provided. For additional Matt Black, Matt Ivory, Midnight Blue, Laurel Green and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version Marlborough stove. The components usually required are:

Description	Product Code
1' Straight pipe, Matt Black	4500
2' Straight pipe, Matt Black	4501
3' Straight pipe, Matt Black	4502
90° long 'elbow' adaptor (9" projection), Matt Black	4514
1' Straight pipe, Midnight Blue	4500MBL
2' Straight pipe, Midnight Blue	4501MBL
3' Straight pipe, Midnight Blue	4502MBL
1' Straight pipe, Laurel Green	4500LG
2' Straight pipe, Laurel Green	4501LG
3' Straight pipe, Laurel Green	4502LG
1' Straight pipe, Matt Ivory	4500PI
2' Straight pipe, Matt Ivory	4501PI
3' Straight pipe, Matt Ivory	4502PI
Flue collar, Matt Black	8549
Flue collar, Midnight Blue	8549MB
Flue collar, Laurel Green	8549LG
Flue collar, Matt Ivory	999-407
Remote Controls for Gas Clarendon	
Description	Product Code

Description	Product Code
Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456

Longer legs - Matt Black only

A set of longer legs, raising the height of the Clarendon by 2%" (55mm) is available as an optional extra*. Product code 8113.

*Not suitable for use with optional rear closure plate.

The above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or

you can download the full installation instructions from the Gazco website at $\ensuremath{\mathsf{www.gazco.com}}$

Gas and Electric Ashdon

	Product Code	Colour	Flue Type	Logs/ Coals	Fuel Type	Heat Input	Heat Output	Efficiency
(\boxtimes)	8513	Matt Black	Conventional	Coals	Nat.Gas	6.60kW	5.15kW	78%
\boxtimes	8513B	Midnight	Conventional	Coals	Nat.Gas	6.60kW	5.15kW	78%
\boxtimes	8513G	Laurel	Conventional	Coals	Nat.Gas	6.60kW	5.15kW	78%
	8513V	lvory	Conventional	Coals	Nat.Gas	6.60kW	5.15kW	78%
	570-006	Matt Ivory	Conventional	Coals	Nat.Gas	6.60kW	5.15kW	78%
X	8613LUC	Matt Black	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
	8613BLUC	Midnight	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
(X)	8613GLUC	Laurel	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
\boxtimes	8613VLUC	lvory	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
\boxtimes	570-022	Matt Ivory	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
	8546LUC	Matt Black	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
(\mathbf{X})	8546BLUC	Midnight	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
\otimes	8546GLUC	Laurel	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
(X)	8546VLUC	lvory	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
(\boxtimes)	570-040	Matt Ivory	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
(X)	P8513	Matt Black	Conventional	Coals	LPG	6.30kW	4.91kW	78%
\boxtimes	P8513B	Midnight	Conventional	Coals	LPG	6.30kW	4.91kW	78%
	P8513G	Laurel	Conventional	Coals	LPG	6.30kW	4.91kW	78%
\boxtimes	P8513V	lvory	Conventional	Coals	LPG	6.30kW	4.91kW	78%
\boxtimes	570-697	Matt Ivory	Conventional	Coals	LPG	6.30kW	4.91kW	78%
(X)	P8613LUC	Matt Black	Conventional	Logs	LPG	6.40kW	5.25kW	82%
	P8613BLUC	Midnight	Conventional	Logs	LPG	6.40kW	5.25kW	82%
(\boxtimes)	P8613GLUC	Laurel	Conventional	Logs	LPG	6.40kW	5.25kW	82%
\boxtimes	P8613VLUC	lvory	Conventional	Logs	LPG	6.40kW	5.25kW	82%
\boxtimes	570-664	Matt Ivory	Conventional	Logs	LPG	6.40kW	5.25kW	82%
(X)	P8546LUC	Matt Black	Balanced	Logs	LPG	6.15kW	5.04kW	82%
\boxtimes	P8546BLUC	Midnight	Balanced	Logs	LPG	6.15kW	5.04kW	82%
(X)	P8546GLUC	Laurel	Balanced	Logs	LPG	6.15kW	5.04kW	82%
(X)	P8546VLUC	lvory	Balanced	Logs	LPG	6.15kW	5.04kW	82%
(X)	570-632	Matt Ivory	Balanced	Logs	LPG	6.15kW	5.04kW	82%
\boxtimes	E8613	Matt Black	N/A	Logs	Elec	-	2.00kW	99%
(X)	E8613MB	Midnight	N/A	Logs	Elec	-	2.00kW	99%
\boxtimes	E8613LG	Laurel	N/A	Logs	Elec	-	2.00kW	99%
\boxtimes	E8613IV	lvory	N/A	Logs	Elec	-	2.00kW	99%
\boxtimes	670-389	Matt Ivory	N/A	Logs	Elec	-	2.00kW	99%

Gas Ashdon Clear Glass

8522	Matt Black	Conventional	Coals	Nat.Gas	6.60kW	5.15kW	78%
🗵 8522B	Midnight	Conventional	Coals	Nat.Gas	6.60kW	5.15kW	78%
🛛 8522G	Laurel	Conventional	Coals	Nat Gas	6.60kW	5.15kW	78%
🗵 8522V	lvory	Conventional	Coals	Nat Gas	6.60kW	5.15kW	78%
570-070	Matt Ivory	Conventional	Coals	Nat Gas	6.60kW	5.15kW	78%
🛛 8614LUC	Matt Black	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
8614BLUC	Midnight	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
8614GLUC	Laurel	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
8614VLUC	lvory	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
8 570-099	Matt Ivory	Conventional	Logs	Nat.Gas	6.60kW	5.28kW	80%
🛛 8544LUC	Matt Black	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
🗵 8544BLUC	Midnight	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
🗵 8544GLUC	Laurel	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
8544VLUC	lvory	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
🗵 570-123	Matt Ivory	Balanced	Logs	Nat.Gas	6.40kW	5.25kW	82%
🗵 P8522	Matt Black	Conventional	Coals	LPG	6.30kW	4.91kW	78%
🛛 P8522B	Midnight	Conventional	Coals	LPG	6.30kW	4.91kW	78%
🛛 P8522G	Laurel	Conventional	Coals	LPG	6.30kW	4.91kW	78%
🛛 P8522V	lvory	Conventional	Coals	LPG	6.30kW	4.91kW	78%
8 570-601	Matt Ivory	Conventional	Coals	LPG	6.30kW	4.91kW	78%


Gas Ashdon Clear Glass (continued)

	Product Code	Colour	Flue Type	Logs/ Coals	Fuel Type	Heat Input	Heat Output	Efficiency
\boxtimes	P8614LUC	Matt Black	Conventional	Logs	LPG	6.40kW	5.25kW	82%
(\mathbf{X})	P8614BLUC	Midnight	Conventional	Logs	LPG	6.40kW	5.25kW	82%
	P8614GLUC	Laurel	Conventional	Logs	LPG	6.40kW	5.25kW	82%
(\boxtimes)	P8614VLUC	lvory	Conventional	Logs	LPG	6.40kW	5.25kW	82%
	570-567	Matt Ivory	Conventional	Logs	LPG	6.40kW	5.25kW	82%
\boxtimes	P8544LUC	Matt Black	Balanced	Logs	LPG	6.15kW	5.04kW	82%
	P8544BLUC	Midnight	Balanced	Logs	LPG	6.15kW	5.04kW	82%
\boxtimes	P8544GLUC	Laurel	Balanced	Logs	LPG	6.15kW	5.04kW	82%
(X)	P8544VLUC	lvory	Balanced	Logs	LPG	6.15kW	5.04kW	82%
(\boxtimes)	570-546	Matt Ivory	Balanced	Logs	LPG	6.15kW	5.04kW	82%

*(Balanced flue version $20\frac{1}{2}$ 520mm).

[†](Balanced flue version 6¹/₄ 158mm). Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

The Ashdon has a choice of top or rear flue exit.



Stove Flue Pipe (Matt Black, Laurel Green, Midnight Blue Ivory or Matt Ivory)

Balanced flue versions of the Gas Ashdon must only use the 6" stainless steel flue provided. For additional Matt Black, Matt Ivory, Midnight Blue, Laurel Green and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" enamelled stove pipe with the conventional flue version Ashdon stove. The components usually required are:

Description	Product Code
1' Straight pipe, Matt Black	4500
2' Straight pipe, Matt Black	4501
3' Straight pipe, Matt Black	4502
90° long 'elbow' adaptor (9" projection), Matt Black	4514
1' Straight pipe, Midnight Blue	4500MBL
2' Straight pipe, Midnight Blue	4501MBL
3' Straight pipe, Midnight Blue	4502MBL
1' Straight pipe, Laurel Green	4500LG
2' Straight pipe, Laurel Green	4501LG
3' Straight pipe, Laurel Green	4502LG
1' Straight pipe, Ivory	4500IV
2' Straight pipe, Ivory	4501IV
3' Straight pipe, Ivory	4502IV
1' Straight pipe, Matt Ivory	4500PI
2' Straight pipe, Matt Ivory	4501PI
3' Straight pipe, Matt Ivory	4502PI
Flue collar, Matt Black	8549
Flue collar, Midnight Blue	8549MB
Flue collar, Laurel Green	8549LG
Flue collar, Ivory	8549IV
Flue collar, Matt Ivory	999-407

Remote Controls for Gas Ashdon

Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456

Longer legs - Matt Black only


A set of longer legs, raising the height of the Ashdon by $2/_{\rm s}$ (55mm) is available as an optional extra. Product code 8113.

The above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove.

This can be obtained from your local Gazco retailer or you can download the full installation instructions from the

Gas Ceramica Manhattan

Product Code	Colour/ Finish	Logs/ Coals	Flue Type	Fuel Type	Heat Input	Heat Output	Efficiency
🗵 8578A	Matt Beige	Coals	Conventional	Nat.Gas	6.60kW	5.15kW	78%
🛛 8615ALUC	Matt Beige	Logs	Conventional	Nat.Gas	6.60kW	5.15kW	78%
🗵 8537ALUC	Matt Beige	Logs	Balanced	Nat.Gas	6.40kW	5.25kW	82%
🛛 P8578A	Matt Beige	Coals	Conventional	LPG	6.30kW	4.91kW	78%
P8615ALUC	Matt Beige	Logs	Conventional	LPG	6.40kW	4.99kW	78%
P8537ALUC	Matt Beige	Logs	Balanced	LPG	6.15kW	5.04kW	82%

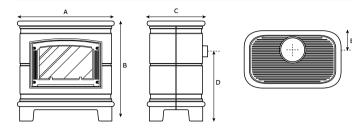

Ceramica Manhattan Dimensions (see letters on diagram)

Due durat Carda		A B		с		D		E		
Product Code	ins	mm								
Ceramica	28	711	28%	720	16¾	427	17%	453	5¾	145

Remote Controls for Gas Ceramica Manhattan

Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm) rear must be a minimum of 2" (50mm).

The Manhattan has a choice of top or rear flue exit. Small steel balanced flue stoves are rear exit only.

Stove Flue Pipes

Balanced flue versions of the Gas Manhattan must only use the 6" stainless steel flue provided. For additional Matt Black, Midnight Blue, Laurel Green and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version Manhattan stove. The components usually required are:

Description	Product Code
1' Straight pipe	4500
2' Straight pipe	4501
3' Straight pipe	4502
90° Long 'elbow' adaptor (9" projection)	4514
Flue collar	8549

Riva Nemos

Product Code	Steel Finish	Fuel Effect	Fuel Type	Heat Input	Heat Output	Efficiency
🗵 8627IR	Iridium	Driftwood	Nat.Gas	6.80kW	5.10kW	75%
🗵 8627BS	Brushed Stainless	Driftwood	Nat.Gas	6.80kW	5.10kW	75%
🗵 P8627IR	Iridium	Driftwood	LPG	6.30kW	4.73kW	75%
🗵 P8627BS	Brushed Stainless	Driftwood	LPG	6.30kW	4.73kW	75%


Recommended clearances between stove and other surfaces: top 8" (200mm), sides 2" (50mm), rear 2" (50mm). The Riva Nemos has a top flue exit only.

Remote Controls for Riva Nemos

Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456

Gas and Electric Steel Manhattan

	Product Code	Model	Steel Finish	Flue Type	Logs/ Coals	Fuel Type	Heat Input	Heat Output	Efficiency
(\boxtimes)	8622AN	Small	Anthracite	Bal. Flue	Logs	Nat.Gas	3.65kW	2.85kW	78%
\boxtimes	8622BS	Small	Brushed Stainless	Bal. Flue	Logs	Nat.Gas	3.65kW	2.85kW	78%
\boxtimes	8619AN	Medium	Anthracite	Con. Flue	Coals	Nat.Gas	6.60kW	5.15kW	78%
\boxtimes	8619BS	Medium	Brushed Stainless	Con. Flue	Coals	Nat.Gas	6.60kW	5.15kW	78%
\boxtimes	8618ANLUC	Medium	Anthracite	Con. Flue	Logs	Nat.Gas	6.60kW	5.28kW	80%
\boxtimes	8618BSLUC	Medium	Brushed Stainless	Con. Flue	Logs	Nat.Gas	6.60kW	5.28kW	80%
\boxtimes	8620ANLUC	Medium	Anthracite	Bal. Flue	Logs	Nat.Gas	6.40kW	5.25kW	82%
\boxtimes	8620BSLUC	Medium	Brushed Stainless	Bal. Flue	Logs	Nat.Gas	6.40kW	5.25kW	82%
\boxtimes	P8622AN	Small	Anthracite	Bal. Flue	Logs	LPG	3.65kW	2.85kW	78%
\boxtimes	P8622BS	Small	Brushed Stainless	Bal. Flue	Logs	LPG	3.65kW	2.85kW	78%
\boxtimes	P8619AN	Medium	Anthracite	Con. Flue	Coals	LPG	6.30kW	4.91kW	78%
\boxtimes	P8619BS	Medium	Brushed Stainless	Con. Flue	Coals	LPG	6.30kW	4.91kW	78%
\boxtimes	P8618ANLUC	Medium	Anthracite	Con. Flue	Logs	LPG	6.40kW	5.25kW	82%
\boxtimes	P8618BSLUC	Medium	Brushed Stainless	Con. Flue	Logs	LPG	6.40kW	5.25kW	82%
\boxtimes	P8620ANLUC	Medium	Anthracite	Bal. Flue	Logs	LPG	6.15kW	5.04kW	82%
\boxtimes	P8620BSLUC	Medium	Brushed Stainless	Bal. Flue	Logs	LPG	6.15kW	5.04kW	82%
	E8622AN	Small	Anthracite	N/A	Logo	Electric	_	2.00kW	99%
-				,					
	E8622BS	Small	Brushed Stainless			Electric		2.00kW	99%
(X)	E8619AN	Medium	Anthracite	N/A	Logs	Electric	-	2.00kW	99%
\boxtimes	E8619BS	Medium	Brushed Stainless	N/A	Logs	Electric	-	2.00kW	99%
	c		в						






Steel Manhattan Dimensions (see letters on diagram)

Due do et Ce de	A		в		с		D		E	
Product Code	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm
Small Steel	24%	633	21%	540	14%	360	16¼	425	-	-
Medium Steel (BF)	26%	683	271/8	709	16¾	425	20	509	7	177
Medium Steel (CF)	26%	683	271/8	709	16¼	425	17%	455	5%	144
Small Electric	24%	633	211⁄4	540	14%	360	-	-	-	-
Medium Electric	26%	683	271/8	709	16¾	425	-	-	-	-

Remote Controls for Gas Steel Manhattan

Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456



Anthracite and Stainless Steel flue pipe

For details of kits and components, please see page 65.

Stove Flue Pipe

Balanced flue Gas Riva Nemos must only use the 6" stainless steel flue provided.

The above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions from the Gazco website at www.gazco.com

Gas F40 Avanti

Product Code	Model	Flue Type	Logs/ Coals	Fuel Type	Heat Input	Heat Output	Efficiency
8685MCUC	Avanti	Conventional	Coals	Nat Gas	5.45kW	3.98kW	73%
8685MMCUC	Midi	Conventional	Coals	Nat Gas	5.45kW	3.98kW	73%
8685HMCUC	Highline	Conventional	Coals	Nat Gas	5.45kW	3.98kW	73%
🗵 8686LUC	Avanti	Balanced	Logs	Nat Gas	5.00kW	3.90kW	78%
🗵 8686MLUC	Midi	Balanced	Logs	Nat Gas	5.00kW	3.90kW	78%
🛛 8686HLUC	Highline	Balanced	Logs	Nat Gas	5.00kW	3.90kW	78%
P8685MCUC	Avanti	Conventional	Coals	LPG	5.50kW	4.02kW	73%
P8685MMCUC	Midi	Conventional	Coals	LPG	5.50kW	4.02kW	73%
P8685HMCUC	Highline	Conventional	Coals	LPG	5.45kW	4.02kW	73%
🛛 P8686LUC	Avanti	Balanced	Logs	LPG	4.60kW	3.59kW	78%
P8686MLUC	Midi	Balanced	Logs	LPG	4.60kW	3.59kW	78%
P8686HLUC	Highline	Balanced	Logs	LPG	4.60kW	3.59kW	78%

Gas F40 Avanti Conventional & Balanced Flue Dimensions (see letters on diagram)

	Α		В			с	I	C	Е	
	ins	mm	ins	mm	ins	mm	ins*	mm*	ins	mm
Avanti	18%	462	25%	644	13	331	171/8/17	453/456	41/8	119
Midi	18%	462	32½	824	13	331	25 / 25%	633/636	41/8	119
Highline	18%	462	39%	999	13	331	31%/32	808/811	41/8	119

*CF/BF

Remote Controls for Gas F40 Avanti

Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456

Gas Riva F67

Product Code	Model	Flue Type	Logs/ Coals	Fuel Type	Heat Input	Heat Output	Efficiency
8742CFLUC	F67	Con. Flue	Logs	Nat Gas	6.80kW	4.90kW	72%
8742BFLUC	F67	Bal. Flue	Logs	Nat Gas	6.10kW	4.58kW	75%
8741CFLUC	F67 Pedestal	Con. Flue	Logs	Nat Gas	6.80kW	4.90kW	72%
8741BFLUC	F67 Pedestal	Bal. Flue	Logs	Nat Gas	6.10kW	4.58kW	75%
P8742BFLUC	F67	Bal. Flue	Logs	LPG	5.80kW	4.35kW	75%
P8742CFLUC	F67	Con. Flue	Logs	LPG	6.70kW	4.82kW	72%
P8741CFLUC	F67 Pedestal	Con. Flue	Logs	LPG	6.70kW	4.82kW	72%
P8741BFLUC	F67 Pedestal	Bal. Flue	Logs	LPG	5.80kW	4.35kW	75%

Remote Controls for Gas Riva F67

Standard Remote Control Kit	8455
Programmable Thermostatic/Timer Remote Control Kit	8456

Gas F67 Riva Dimensions (see letters on diagram)


	Α		в		(с		D		Ξ
	ins	mm	ins	mm	ins	mm	ins	mm	ins	mm
Riva F67 (CF)	23¼	592	16½	420	41/8	124	21¼	540	34%	880
Riva F67 (BF)	23¼	592	16½	420	51/8	149	21¼	543	34%	880
Riva F67 Pedestal (CF)	33%	834	16½	420	41/8	124	21¼	540	34%	880
Riva F67 Pedestal (BF)	33%	834	16½	420	5%	149	21¼	543	34%	880

The Riva F67 can also be placed on one of our six Riva Stove Benches. Please see page 65 for further information. Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear 2" (50mm). *(Balanced flue 6/2" 165mm).

Stove Flue Pipe

Balanced flue versions of the Gas F4O Avanti must only use the 6" stainless steel flue provided. For additional Matt Black, Midnight Blue, Laurel Green and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version F4O Avanti stove. The components usually required are:

Description	Product Code
1' Straight pipe	4500
2' Straight pipe	4501
3' Straight pipe	4502
90° Long 'elbow' adaptor (9" projection)	4514
Flue collar	8549




Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear 2" (50mm). The Gas F67 Riva has a top flue exit only.

Stove Flue Pipe

Balanced flue versions of the Gas Riva F67 must only use the 6" stainless steel flue provided. For additional Matt Black, Midnight Blue, Laurel Green and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version Riva F67 stove. The components usually required are:

Description	Product Code
1' Straight pipe	4500
2' Straight pipe	4501
3' Straight pipe	4502
90° Long 'elbow' adaptor (9" projection)	4514
Flue collar	8549



Gas & Electric Riva Vision

	Product Code	Model	CF/ BF	Fuel Effect	Lining	Fuel Type	Flue Exit	Heat Input (kW)	Heat Output (kW)	Efficiency
Gas	s Riva Visi	on Sma	II - S	tandard	Control					
	526-183	Small	CF	Logs	Vermiculite	Nat. Gas	Rear	3.4	2.55	75%
X	526-067	Small	CF	Logs	Vermiculite	Nat Gas	Тор	3.4	2.55	75%
\boxtimes	526-280	Small	BF	Logs	Vermiculite	Nat Gas	Rear	3.2	2.56	80%
X	526-619	Small	CF	Logs	Vermiculite	LPG	Rear	3.2	2.40	75%
	526-501	Small	CF	Logs	Vermiculite	LPG	Тор	3.2	2.40	75%
	526-757	Small	BF	Logs	Vermiculite	LPG	Rear	3.2	2.56	80%
Gas	s Riva Visi	on Sma	II - T	hermosta	atic Contr	ol				
	526-192	Small	CF	Logs	Vermiculite	Nat. Gas	Rear	3.4	2.55	75%
	526-710	Small	CF	Logs	Vermiculite	LPG	Rear	3.2	2.40	75%
X	526-166	Small	CF	Logs	Vermiculite	Nat Gas	Тор	3.4	2.55	75%
	526-548	Small	CF	Logs	Vermiculite	LPG	Тор	3.2	2.40	75%
	526-362	Small	BF	Logs	Vermiculite	Nat. Gas	Rear	3.2	2.56	80%
X	526-809	Small	BF	Logs	Vermiculite	LPG	Rear	3.2	2.56	80%
Gas	s Riva Visi	on Midi	- Sta	andard C	ontrol					
	526-347	Midi	CF	Logs	Vermiculite	Nat.Gas	Rear	4.55	3.41	75%
X	526-386	Midi	CF	Logs	Vermiculite	Nat. Gas	Тор	4.55	3.41	75%
	526-290	Midi	BF	Logs	Vermiculite	Nat.Gas	Rear	4.3	3.44	80%
X	526-207	Midi	BF	Logs	Vermiculite	Nat. Gas	Тор	4.3	3.44	80%
X	526-479	Midi	CF	Logs	Vermiculite	LPG	Rear	4.35	3.26	75%
	526-534	Midi	CF	Logs	Vermiculite	LPG	Тор	4.35	3.26	75%
X	526-668	Midi	BF	Logs	Vermiculite	LPG	Rear	4.3	3.44	80%
X	526-561	Midi	BF	Logs	Vermiculite	LPG	Тор	4.3	3.44	80%
Gas	s Riva Visi	on Midi	- Th	ermostat	tic Contro	I				
	526-313	Midi	CF	Logs	Vermiculite	Nat.Gas	Rear	4.55	3.41	75%
	526-746	Midi	CF	Logs	Vermiculite	LPG	Rear	4.35	3.26	75%
X	526-393	Midi	CF	Logs	Vermiculite	Nat.Gas	Тор	4.55	3.41	75%
X	526-570	Midi	CF	Logs	Vermiculite	LPG	Тор	4.35	3.26	75%
×	526-353	Midi	BF	Logs	Vermiculite	Nat. Gas	Rear	4.3	3.44	80%
	526-782	Midi	BF	Logs	Vermiculite	LPG	Rear	4.3	3.44	80%
	526-235	Midi	BF	Logs	Vermiculite	LPG	Rear	4.3	3.44	80%
X	526-718	Midi	BF	Logs	Vermiculite	LPG	Тор	4.3	3.44	80%
Gas	s Riva Visi	on Larg	je - T	hermost	atic Contr	rol (Top e	exit o	nly)		
	526-008	Large	CF	W. Stones	B.Enamel	Nat. Gas	Тор	6.90	5.20	75%
X	526-793	Large	CF	W. Stones	B.Enamel	LPG	Тор	6.90	5.20	75%
	526-039	Large	CF	Logs	Vermiculite	Nat. Gas	Тор	6.70	5.00	75%
X	526-414	Large	CF	Logs	Vermiculite	LPG	Тор	6.30	5.10	81%
	526-085	Large	CF	Logs	B.Reeded	Nat.Gas	Тор	6.90	5.20	75%
	526-460	Large	CF	Logs	B.Reeded	LPG	Тор	6.90	5.20	75%
	526-303	Large	BF	W. Stones	B.Enamel	Nat.Gas	Тор	6.30	5.10	81%
	526-624	Large	BF	W. Stones	B.Enamel	LPG	Тор	6.10	4.95	81%
	526-107	Large	BF	Logs	Vermiculite	Nat. Gas	Тор	6.40	5.20	81%
	FOC 474		05			1.000	-	c 00	E 10	0101

X 526-158 ΒF Nat. Gas Тор Large Logs \boxtimes 526-631 Large ΒF B.Reeded LPG Logs

Logs

BF

Electric Riva Vision Small & Midi with Remote Control

(\boxtimes)	634-680	Small	-	Logs	-	Electric	-	-	2.00	99%
	634-733	Midi	-	Logs	-	Electric	-	-	2.00	99%

Vermiculite

B.Reeded

LPG

6.30

6.40

6.30

Тор

Тор

5.10

5.20

5.10

81%

81%

81%

Gas Riva Vision - Accessories

Large

526-474


923-797	Clear Glass fuel effect upgrade ◊
923-746	Red Glass fuel effect upgrade ◊
923-735	Black Glass fuel effect upgrade ◊
923-517	Large Riva Vision Conventional Flue - Black Reeded Lining Set \ddagger
923-607	Large Riva Vision Balanced Flue - Black Reeded Lining Set \ddagger
999-530	Thermostatic system mains adaptor

 \Diamond Available as an upgrade to Riva Vision Large models with White Stone fuel bed

64 ‡ Available for Riva Vision Large models with Log effect fuel bed The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove.

This can be obtained from your local Gazco retailer or you can download the full installation instructions from the Gazco website at www.gazco.com

Gas Riva Vision Small & Midi Dimensions



*Glass Viewing Area

Gas Riva Vision Small & Midi Dimensions (see letters on diagram)


All sizes in mm	Α	в	с	D	Е	F	G	н	I	J	К	L	м
Small CF	143	57	58	254	240	122	370	43	529	359	185	97	289
Small BF [†]	-	57	58	254	240	122	370	-	529	379	185	-	289
Midi CF	143	65	50	316	241	127	415	43	605	436	207.5	96	311
Midi BF	173	65	50	316	241	127	415	69	605	456	207.5	142	311

Riva Vision Small Balanced flue is rear flue exit only

Electric Riva Vision Small & Midi Dimensions (see letters on diagram)

All sizes in mm	Α	в	с	D	Е	F	G	н	Т	J	к	L	м
Small	-	-	-	-	-	-	370	-	555	-	-	-	297
Midi	-	-	-	-	-	-	415	-	604	-	-	-	317

Gas Riva Vision Large Dimensions



Gas Riva Vision Large Dimensions (see letters on diagram)

All sizes in		В	с	D	E	F	G	н	I	J	к	L	м
Large CF	144	96	115	646	320	172	66	43	631	390	876	438	140
Large BF	173	97	115	646	320	171	62	69	656	375	876	438	152
-										-			

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear 2" (50mm). The Gas Riva Vision Large has a top flue exit only.

The Gas Riva Vision stoves can also be placed on one of our ten Riva Stove Benches. Please see page 65 for further information.

Stove Flue Pipe

Balanced flue versions of the Gas Riva Visions must only use the 6" stainless steel or anthracite flue pipe. For the conventional flue version of the Gas Riva Vision Gazco recommends the use of 5" matt black or gloss enamelled stove pipe. The components usually required are:

Matt Black Flue Pipe	Product Code	Gloss Flue Pipe	Product Code	
1' Straight pipe	4500	1' Straight pipe	4500GB	
2' Straight pipe	4501	2' Straight pipe	4501GB	
3' Straight pipe	4502	3' Straight pipe	4502GB	
90° Long 'elbow' adaptor (9" projection)	4514	135° Bend	4512GB	
Flue collar	8549			

5% 0%

5%

Components for balanced flue models

Ask your retailer for full technical details or see our Concentric Flue System brochure at www.gazco.com

Additional Stainless Steel components for top exit (as required)

200mm straight (effective length 140mm)

500mm straight (effective length 440mm) 1000mm straight (effective length 940mm)



Product Code

8527 8528

8529

Basic Stainless Steel Kits	Product Code
Rear exit, horizontal - complete with terminal guard	8526
Top exit, up & out, stoves	8523
Top exit, up & out, Nemos, Riva Vision Large & F67	8534
Top exit, vertical	8524
45° offset bend (set of two) for use with 8524	8530
Top exit vertical, Huntingdon 30 & Stockton 5	999-539
Basic Anthracite Steel Kits	Product Code
Top exit, up & out, stoves	8523AN
Top exit, up & out, Nemos, Riva Vision Large & F67	8534AN
Top exit, vertical	8524AN
45° offset bend (set of two) for use with 8524AN	8530AN
Top exit vertical, Huntingdon 30 & Stockton 5	999-539AN
Basic Matt Ivory Steel Kits	Product Code
Top exit, up & out, stoves	999-111
Top exit, vertical	999-301
Top exit vertical, Huntingdon 30 & Stockton 5	999-224
45° offset bend (set of two) for use with 999-301	999-148

Rear Exit Terminal

Up & Out Terminal

Vertical Terminal

8548IV

999-433



Flue collar, Ivory Flue collar, Matt Ivory



200mm 150mm 500mm	. []
Additional Cast Iron components for top exit	Product Code
Flue collar, Matt Black	8548
Flue collar, Midnight Blue	8548MB
Flue collar, Laurel Green	8548LG

(chocare longar s remain)	
364-554mm adjustable straight	999-062
15° bend	999-003
30° bend	999-016
45° bend	8507
90° bend	8508
Rear flue terminal	999-096
Horizontal flue terminal (wall)	999-105
Vertical flue terminal (roof)	999-141
Fixed wall support	999-072
Adjustable wall support	999-130
External wall finishing plate	999-235
Additional Anthracite Steel components for top exit (as required)	Product Code
200mm straight (effective length 140mm)	8527AN
500mm straight (effective length 440mm)	8528AN
1000mm straight (effective length 940mm)	8529AN
15° bend	999-031
30° bend	999-078
45° bend	8507AN
90° bend	8508AN
Additional Matt Ivory Steel components for top exit (as required)	Product Code
200mm straight (effective length 140mm)	999-357
500mm straight (effective length 440mm)	999-372
1000mm straight (effective length 940mm)	999-391
15° bend	999-051
30° bend	999-067
45° bend	999-172
90° bend	999-284
Terminal Guards	Product code
Rear exit	999-159
Horizontal exit	999-201

Riva Benches

Compatible with the Gas Riva Vision (page 38-43) and the Riva F67 Gas (page 44-47).

Product Code	Product	W (mm)	H (mm)	D (mm)
RVACLB45B	45 Low Riva bench	450	250	420
RVACB45B	45 High Riva bench	450	350	420
RVACLB100B	100 Low Riva bench	1000	250	420
RVACB100B	100 High Riva bench	1000	350	420
RVACLB120B	120 Low Riva bench	1200	250	420
RVACB120B	120 High Riva bench	1200	350	420
RVACLB140B	140 Low Riva bench	1400	250	420
RVACB140B	140 High Riva bench	1400	350	420
RVACLB180B	180 Low Riva bench	1800	250	465
RVACB180B	180 High Riva bench	1800	350	465



The above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions from the Gazco website at www.gazco.com



Gazco Gas Fires

Featuring hundreds of different fire and surround permutations, this brochure really does feature a fire for every home. Offering the wonderful ambience of a real fire-effect with superb efficiency, these built-in appliances give you the choice of gas or electric to heat your home. To receive a copy of the Gas Fires brochure, please call **0844 4141 322**.

www.gazco.com

www.qazco.com

www.stovax.com

www.stovax.com



Gazco Electric Fires & Stoves

It's never been so easy to get the warm inviting atmosphere of a real flame fire with all the convenience, versatility and efficiency of electric. Using the latest Flame-Effect Technology, Gazco has created a beautiful range of electric fires and stoves that provide a versatile and stunning focal point for any home – and all without the need for a chimney! To receive a copy of the Gazco Electric Fires & Stoves brochure, please call **0844 4141 322**.



Stovax Woodburning & Multi-fuel Stoves

Relax in the irresistible ambience that a real woodburning stove creates. Stovax stoves offer a wide range of expertly crafted designs from contemporary to traditional, giving you the flexibility required for modern day living. Synonymous with quality and efficiency these extraordinary stoves will really make a statement that friends and family will warm to instantly. To receive a copy of the Stovax Stoves brochure, please call **0844 4141 322**.



Stovax Riva Studio Fires

Expertly designed, the Riva Studio's clean, contemporary lines complement modern interiors and incorporate Stovax's technically advanced Cleanburn combustion and Airwash systems. To own a Riva Studio is to make a design statement that will become a heart-warming focal point to your home. There are even four Freestanding models to ensure that there will be a Riva Studio just right for you. To receive a copy of the Riva Studio brochure, please call **0844 4141 322**.



Yeoman Wood, Multi-fuel, Gas & Electric Stoves www.yeoman-stoves.co.uk

From its humble origins over 25 years ago on a farm near Dartmoor, renowned for its cold winters, Yeoman has grown to become one of the UK's leading stove manufacturers. Today, Yeoman offers not only a wide selection of traditionally-styled woodburning, multi-fuel, gas and electric stoves, but also high-output boiler stoves through to contemporary stoves with each model providing superb value for money. To receive a copy of the Yeoman brochure, please call **01392 474060**.

Details on the full range of products available and brochure PDF's can be found at all the websites as detailed above, alternatively you can scan this QR code to view our whole range of brochures.



Gazco is a member of the Stovax Group which manufactures and distributes many other high quality fireplace products:



Gazco gratefully acknowledges the assistance of the following companies with photographic settings:

Furnishings and Ornaments:- www.furniturevillage.co.uk; www.debenhams.com; www.eclectique.co.uk; www.theorangetree.co.uk; www.homebase.co.uk; www.lauraashley.com; www.faginsantiques.com; www.nestinteriors.com; www.stbridgetnurseries.co.uk; www.ashorejewellery.co.uk; www.johnlewis.com Wood Mantels:- www.stovax.com Stone Mantels:- www.rudloe-stone.com; www.farmington.co.uk; www.bnsp.co.uk Paintings:- www.easyart.com Wood Flooring:- www.beachbros.co.uk Stone Floors:- www.originalstyle.com Televisions:- www.heavitreeradio.co.uk





complete range of brochures, simply scan this code or visit www.gazco.com

To view & download our



£3.00

Your Gazco stockist:



Gazco Limited

Osprey Road, Sowton Industrial Estate, Exeter, Devon, England EX2 7JG Tel: 01392 261999 Fax: 01392 444148 E-mail: info@gazco.com Internet: www.gazco.com

A member of the Stovax Group

Paper sourced from sustainable forests and printed using vegetable based inks